



2

Solenoid - Spring


3/2

Ordering code


464.1.0.1.M2

5/2



Solenoid - Spring



- TYPE
- 1 32=3 ways
 - 52=5 ways



Weight gr. 530
Minimum working pressure 2,5 bar



Weight gr. 625
Minimum working pressure 2,5 bar

Operational characteristics

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)	Working ports size
Filtered and lubricated air	10	-5 ÷ +50	1360 Nl/min	mm 8	G 1/4"

Solenoid - Differential


3/2

Ordering code


464.1.0.12.M2

5/2



Solenoid - Differential



- TYPE
- 1 32=3 ways
 - 52=5 ways



Weight gr. 650
Minimum working pressure 2,5 bar



Weight gr. 740
Minimum working pressure 2,5 bar

Operational characteristics

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)	Working ports size
Filtered and lubricated air	10	-5 ÷ +50	1360 Nl/min	mm 8	G 1/4"

Solenoid - Solenoid


3/2

Ordering code


464.1.0.0.M2

5/2


Solenoid - Solenoid



- TYPE
- 1 32=3 ways
 - 52=5 ways



Weight gr. 730
Minimum working pressure 2 bar



Weight gr. 820
Minimum working pressure 2bar

Operational characteristics

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)	Working ports size
Filtered and lubricated air	10	-5 ÷ +50	1360 Nl/min	mm 8	G 1/4"

Solenoid - Solenoid


5/3

Ordering code



464.53.F.0.0.M2

FUNCTION

- F** 31=Closed centres
- 32=Open centres
- 33=Pressured centres

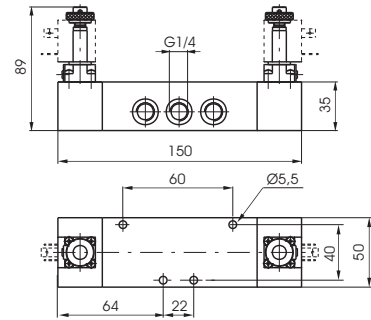

Weight gr. 820
Minimum working pressure 3 bar



Operational characteristics

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size
Filtered and lubricated air	10	-5 ÷ +50	1280 NI/min	mm 8	G 1/4"

3/2 Solenoid - Spring

Ordering code


Solenoid - Spring

5/2




464/1.T.0.1.M2

TYPE

- T** 32=3 ways
- 52=5 ways



Weight gr. 530
Minimum working pressure 2,5 bar



Weight gr. 625
Minimum working pressure 2,5 bar

Operational characteristics

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size
Filtered and lubricated air	10 bar	-5 ÷ +50	1360 NI/min	mm 8	G 1/4"

3/2 Solenoid - Differential

Ordering code


Solenoid - Differential

5/2


464/1.T.0.12.M2

TYPE

- T** 32=3 ways
- 52=5 ways



Weight gr. 650
Minimum working pressure 2,5 bar




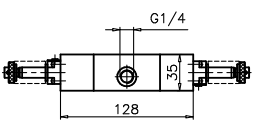
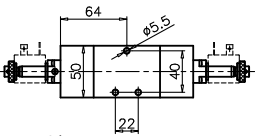

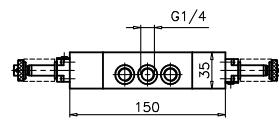
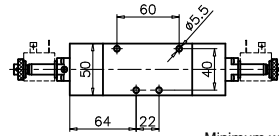
Weight gr. 740
Minimum working pressure 2,5 bar


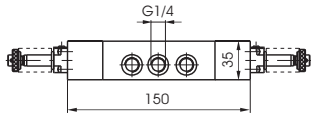
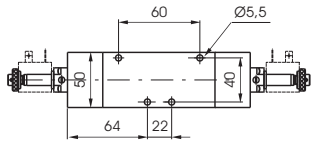



Operational characteristics

Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (NI/min)	Orifice size (mm)	Working ports size
Filtered and lubricated air	10 bar	-5 ÷ +50	1360 NI/min	mm 8	G 1/4"



2

3/2	Solenoid - Solenoid	Ordering code 464/1.1.0.0.M2	Solenoid - Solenoid	5/2			
   Weight gr. 730 Minimum working pressure 2 bar		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: center;">TYPE</td> </tr> <tr> <td>32=3 ways</td> </tr> <tr> <td>52=5 ways</td> </tr> </table>	TYPE	32=3 ways	52=5 ways	   Weight gr. 820 Minimum working pressure 2 bar	
TYPE							
32=3 ways							
52=5 ways							
Operational characteristics							
Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (Nl/min)	Orifice size (mm)	Working ports size		
Filtered and lubricated air	10 bar	-5 ÷ +50	1360 Nl/min	mm 8	G 1/4"		

Solenoid - Solenoid					5/3
Ordering code 464/1.53.F.0.0.M2		  			  
FUNCTION					
F 31=Closed centres 32=Open centres 33=Pressured centres					
Weight gr. 820 Minimum working pressure 3 bar					
Operational characteristics					
Fluid	Max working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (Nl/min)	Orifice size (mm)	Working ports size
Filtered and lubricated air	10 bar	-5 ÷ +50	1280 Nl/min	mm 8	G 1/4"